

REPORT ON ELECTRIC FITTINGS.

(OTHER THAN FOR THE PROPULSION OF THE VESSEL)

Received at London Office 19 APR 1927

Date of writing Report 3-4-1927 When handed in at Local Office 10 Port of

No. in Survey held at Bolnes Date, First Survey 26-1-27 Last Survey 25-3-1927
Reg. Book. on the motor vessel "SHAZA" (Number of Visits 3)

Built at Bolnes By whom built N.V. Boeke's Scheepsw, M. Label No. 157 Tons { Gross 234 Net 86
When built 1917

Owners Shell Company of East Africa Ltd. Port belonging to London

Electric Light Installation fitted by V. Seventer, Co. Contract No. When fitted 1927

System of Distribution Two conductors ✓

Pressure of supply for Lighting 110 ✓ volts, Heating _____ volts, Power _____ volts.

Direct or Alternating Current, Lighting Direct ✓ Power _____

If alternating current system, state frequency of periods per second _____

Has the Automatic Governor been tested and found efficient when the whole load is suddenly thrown on or off yes ✓

Generators, do they comply with the requirements regarding overload yes ✓, are they compound wound yes ✓
are they over compounded 5 per cent. yes ✓, if not compound wound state distance between each generator _____

Where more than one generator is fitted are they arranged to run in parallel _____, is an adjustable regulating resistance fitted in series with each shunt field _____

Are all terminals accessible and clearly marked yes ✓, are they so spaced or shielded that they cannot be accidentally earthed, or short circuited yes ✓ Are the lubricating arrangements of the generators as per Rule yes ✓

Position of Generators in engine room _____, is the ventilation in way of the generators satisfactory yes ✓, are they clear of all inflammable material yes ✓

if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the generators _____ and _____, are the generators protected from mechanical injury and damage from water, steam or oil yes ✓

are their axis of rotation fore and aft yes ✓

Earthing, are the bedplates and frames of the generating plant efficiently earthed yes ✓ are the prime movers and their respective generators in metallic contact yes ✓

Main Switch Boards, where placed in engine room _____

If the generators and main switchboard are not placed in the same compartment, is each generator provided with a fuse on each insulated pole as near as possible to the terminals of the generator, additional to that provided on the main switchboard _____

Switchboards, are they placed in accessible positions, free from inflammable gases and acid fumes yes ✓

are they protected from mechanical injury and damage from water, steam or oil yes ✓, if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the switchboards _____ and _____

are they constructed wholly of durable, incombustible non-absorbent materials yes ✓, is all insulation of high dielectric strength and of permanently high insulation resistance yes ✓, if semi-insulating material is used, are all conducting parts connected to one pole

insulated from the slab with mica or micanite and the slab similarly insulated from its framework yes ✓, and is the frame effectively earthed yes ✓

Are the following fittings as per Rule, viz. :— spacing or shielding of live parts yes ✓, accessibility of all parts yes ✓, absence of fuses on back of board yes ✓, proportion of omnibus bars 0.06 □ " _____, individual fuses to voltmeter, pilot or earth lamp yes ✓, connections of switches _____

Main Switchgear, description of switchgear for each generator and each outgoing circuit, and arrangement of equalizer switches


double pole switch, quick shutoff

Instruments on main switchboard one ammeters one voltmeters _____ synchronising device for paralleling purposes.

Earth Testing, state what means are provided at the main switchboard for indicating the state of the insulation of the system two lamps

Switches, Circuit Breakers and Fusible Cut-outs, do these comply with the requirements of the Rules yes ✓

Section and Distribution Boards, is the construction, protection, insulation, material, and position of these as per rule yes ✓

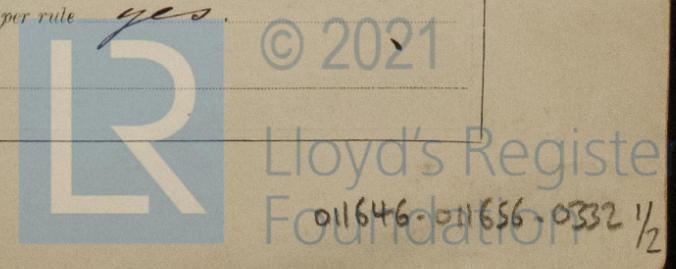

Insulation of Cables, state type of cables, single or twin *twin* are the cables insulated and protected as per Tables III or IV of the Rules *yes*

Fall of Pressure, state maximum between bus bars and any point of the installation under maximum load *2 1/2*

Cable Sockets and other connections, are the ends of all cables having a sectional area of 0.007 square inch and above provided with soldering sockets *yes*

Paper Insulated Cables. If cables are paper covered, is the dielectric at the exposed ends of the conductor protected from moisture by being suitably sealed with insulating compound

Cable Runs, are the cables fixed as far as possible in accessible positions not exposed to drip or accumulation of water or oil, or to high temperature from boilers, steam pipes, uptakes or other hot objects, or to avoidable risk of mechanical damage *yes*

Support and Protection of Cables, state how the cables are supported and protected *galvanized iron clips, protected where necessary in galvanized iron pipes*

If cables are run in wood casings, are the casings and caps secured by screws —, are the cap screws of brass —, are the cables run in separate grooves —. If armoured and lead covered cables are secured by metal clips, are the clips spaced as per Table VI *yes*

Refrigerated Chambers, if lights are fitted, are the cables and fittings in accordance with the special requirements —

Joints in Cables, state if any, and how made, insulated, and protected *soldered, insulated by gummi and insulating band, protected by watertight iron boxes*

Watertight Glands and Deck Tubes, are all cables passing through decks and watertight bulkheads provided with deck tubes or watertight glands *yes*

Bushes in Beams and Non-watertight Positions, where unarmoured cables pass through beams and non-watertight partitions, are the holes efficiently bushed *yes* state the material of which the bushes are made *wood and lead*

Earthing Connections, state what earthing connections are fitted and their respective sectional areas —

are their connections made as per Rule —

Alternative Lighting, are the groups of lights in the propelling machinery space arranged as per Rule *yes*

Emergency Supply, state position and method of control of the emergency supply and how the generator is driven —

Navigation Lamps, are these separately wired *yes*, controlled by separate switch and separate fuses *yes*

are the fuses double pole *yes*, are the switches and fuses grouped in a position accessible only to the officers on watch *yes*

has each navigation lamp an automatic indicator as per Rule *yes*, are separate screens provided for the use of oil and electric side lights *yes*

are separate oil lanterns provided for the mast head lights and side lights *yes*

Fittings, are all fittings on weather decks, in stokeholds and engine rooms and wherever exposed to drip or condensed moisture, watertight *yes*

are any fittings placed in spaces in which goods are liable to be stacked in close proximity to them; if so, how are they protected *iron pipes*

are any fittings placed in spaces where inflammable or explosive dust or gases are liable to be present, if so, how are they protected *the lamps in watertight bulwarks, protected by iron chest and closed glass, how are the cables led outside*

where are the controlling switches situated *outside*

Searchlight Lamps, No. of —, whether fixed or portable —, are their fittings as per Rule —

Arc Lamps, other than searchlight lamps, No. of —, are their live parts insulated from the frame or case —, are their fittings as per Rule —

Motors, are their working parts readily accessible —, are the coils self-contained and readily removable for replacement —

are the brushes, brush holders, terminals and lubricating arrangements as per Rule —, are the motors placed in well-ventilated compartments in which inflammable gases cannot accumulate and clear of all inflammable material

are they protected from mechanical injury and damage from water, steam or oil —, are their axis of rotation fore and aft

if situated near unprotected woodwork or other combustible material, are the motors of the totally enclosed, pipe ventilated, forced draught, drip or flame proof type

if not of this type, state distance of the combustible material horizontally or vertically above the motors — and

Control Gear and Resistances, are the generator field and motor speed regulators, starters and controllers constructed as per Rule *yes*

Lightning Conductors, where lightning conductors are required, are these fitted as per Rule —

Ships carrying Oil having a Flash Point less than 150° F. Have the special requirements of the Rules been complied with regarding switches, joint boxes, section and distribution boards, protection of cables, method of distribution, lead of cables, lights and fittings *yes*

If portable lamps for use in dangerous spaces are supplied, are they of a type approved by the Home Office *yes*

19 APR 1927

PARTICULARS OF GENERATING PLANT.

DESCRIPTION OF GENERATOR.	No of	RATED AT				DRIVEN BY.	WHERE DRIVEN BY AN INTERNAL COMBUSTION ENGINE	
		Kilowatts.	Volts.	Ampères.	Revs. per Min.		Fuel Used.	Flash Point of Fuel.
MAIN	one	4.5	110	40	450	oil motor	oil	above 150°
AUXILIARY	one	2.16	24	90				
-EMERGENCY								
Auxiliary	one	0.29	14-16	12	700	" "		
ROTARY TRANSFORMER								

LIGHTING AND HEATING CONDUCTORS.

Ref. No.	DESCRIPTION.	No. of Conductors.	Effective Area of each Conductor. Sq. Ins.	COMPOSITION OF STRAND.		Total Maximum Current. Ampères.	Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
				No.	Diameter.				
1	MAIN GENERATOR	2	0.0225	7	.064	20	8	gummi	lead iron
	AUXILIARY GENERATOR	2	0.06	19	.064	80	10	"	iron
	EMERGENCY GENERATOR								
	ROTARY TRANSFORMER								
	AUXILIARY SWITCHBOARDS	2	0.0045	7	.029	7	16	"	"
	ENGINE ROOM	2	0.00299	3	.036	4	20	"	"
	BOILER ROOM								
	Aux. Generator	2	0.01	7	.044	12	36	"	"
	WIRELESS								
	SEARCHLIGHT								
	MASTHEAD LIGHT	2	0.00299	3	.036	1	220	gummi	lead iron
	SIDE LIGHTS	2	0.00299	3	.036	1	28	"	"
	COMPASS LIGHTS	2	0.00299	3	.036	1	28	"	"
	POOP LIGHTS	2	0.00299	3	.036	1	75	"	"
	CARGO LIGHTS								
	ARC LAMPS								
	HEATERS								

MOTOR CONDUCTORS.

Ref. No.	DESCRIPTION.	No. of Motors.	Effective Area of each Conductor. Sq. Ins.	COMPOSITION OF STRAND.		Total Maximum Current. Ampères.	Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
				No.	Diameter.				
	BALLAST PUMP								
	MAIN BILGE LINE PUMPS								
	GENERAL SERVICE PUMP								
	EMERGENCY BILGE PUMP								
	SANITARY PUMP								
	CIRC. SEA WATER PUMPS								
	CIRC. FRESH WATER PUMPS								
	AIR COMPRESSOR								
	FRESH WATER PUMP								
	ENGINE TURNING GEAR								
	ENGINE REVERSING GEAR								
	LUBRICATING OIL PUMPS								
	OIL FUEL TRANSFER PUMP								
	WINDLASS								
	WINCHES, FORWARD								
	WINCHES, AFT								
	STEERING GEAR								
	WORKSHOP MOTOR								
	VENTILATING FANS								

4

All Conductors are of annealed copper conforming to British Standard Specification No. 7.
The Insulated Conductors are guaranteed to withstand the immersion and resistance tests specified in the Rules.
The foregoing is a correct description.

W. Paulsen & Co

Electrical Engineers.

Date *25 March 1927*

COMPASSES.

Distance between electric generators or motors and standard compass *66 feet*

Distance between electric generators or motors and steering compass *60 feet*

The nearest cables to the compasses are as follows:—

A cable carrying *0.2* Amperes *one* feet from standard compass feet from steering compass.

A cable carrying *0.2* Amperes *—* feet from standard compass *one* feet from steering compass.

A cable carrying *—* Amperes *—* feet from standard compass *—* feet from steering compass.

Have the compasses been adjusted with and without the electric installation at work at full power *Yes*

Has the effect of switching on and off circuits, motors and other electro-magnetic apparatus within the vicinity of the compasses been noted *Yes*

The maximum deviation due to electric currents was found to be *nil* degrees on *every* course in the case of the standard compass, and *nil* degrees on *every* course in the case of the steering compass.

N.V. „Boele's Scheepswerven
en Machinetaalwerk

Builder's Signature.

Date

Is this installation a duplicate of a previous case *no* If so, state name of vessel *—*

General Remarks (State quality of workmanship, opinions as to class, &c. *This installation has been fitted in accordance with the Rules and found in good working condition when tried and merits in my opinion the Committee's approval.*

It is submitted that
this vessel is eligible for
THE RECORD. Elec. light.

J.W.D.
22/4/27

Total Capacity of Generators *4.5* Kilowatts

The amount of Fee ... *£ 60.00* :
Travelling Expenses (if any) £ : :
When applied for, *124 19 27*
When received, *3 5 27*

W. Bourne
Surveyor to Lloyd's Register of Shipping.

Committee's Minute **FRI. 22 APR 1927**

Assigned

Elec. Lt.

Im. 9.21.—Transfer.
(The Surveyors are requested not to write on or below the space for Committee's Minute.)



© 2021
Lloyd's Register
Foundation