



Does all the Frames extend to the top height in the Poop?	Yes	Raised Quarter Deck?	Yes	Bridge House?	Yes	Forecastle?	Yes
To what height do the Reverse Frames extend?		Upper deck					
Has the Poop or Raised Quarter Deck an efficient Iron Bulkhead at the fore end?			Yeo				
Give particulars of the means for closing the openings in Bulkhead		Storm hatches, full height, in permanent channels					
Is the Poop or Raised Quarter Deck connected with the Bridge House?	No			Has the Bridge House an efficient Bulkhead at the fore end?	Yes		
Give particulars of the means for closing the openings in Bulkhead		Hinged iron door.					
What is the thickness of the Bridge Front plating?	.4"	and Coaming plate?	.44"				
Give scantlings and spacing of the Stiffeners	9" x 3" x .56	B.A.C 31" sprung					
Are bracket plates fitted at each end of the Stiffeners?	Yes			Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks?	Rail carried on		
Has the Bridge House an efficient Iron Bulkhead at the after end?	Yes						
How are the openings closed?	Storm hatches, full height, in permanent channels						
Is the Forecastle at least as high as the main or top-gallant rail?	Yes			Has the Forecastle an efficient Iron or Wood Bulk'd. at after end?	Yes		
Are the Engine and Boiler openings covered by a Bridge, Poop, Raised Quarter Deck, or enclosed by a Strong Iron or Steel Deckhouse?							
If the openings are not so protected are the exposed parts of the Casings efficiently constructed?							
Give thickness of plating; scantlings and spacing of Stiffeners							
What is the height of the exposed Casings?				Are suitable means provided for closing all openings in them in bad weather?	Yeo		
Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below:-				As approved			
Position and Size.	101.32'6" x 20'	202.34'8" x 20'	204.28'2" x 20'	203.17'4" x 18'	Bridge		
Item.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.
COAMING. Height above top of DECK	36"		102.39"		36"		30"
Thickness { Sides.....	.44		" 3.36		.44		.44
Thickness { Ends.....	"		" 44		"		"
SHIFTING BEAMS OR WEB PLATES.	Number		As		As		As
SHIFTING BEAMS OR WEB PLATES.	Section and Scantlings		Int.		Int.		Int.
SHIFTING BEAMS OR WEB PLATES.	Material		18/16 x 36		18/16 x 36		18/16 x 36
* FORE AND AFTERS.	Number	216	Int.	Int.	Int.	Int.	Int.
* FORE AND AFTERS.	Section and Scantlings						
* FORE AND AFTERS.	Material	4x3x.46					
HATCHES Thickness	2 1/2"		2 1/2"		2 1/2"		2 1/2"
Remarks.....							

\* When the Fore and Afters are of wood the depth should be stated from the underside of the hatches.

(If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet Moulded depth) and under Shelter Deck Rules.

What is the thickness of the Bridge Sheerstrake?

Delete the words { The Crew are, are not, berthed in the bridge house.  
that do not apply { The arrangements to enable them to get backwards and forwards from their quarters are, are not satisfactory.


Length of Bulwarks in well

Area of Freeing Ports required by Para. 11 (e) each side of vessel = Sq. ft.

Ft. Tenth. Ft. Tenth. No.

x	x	Freeing Ports (each side of vessel)	=	Sq. ft.
x	x			
x	x			

Total deficiency or excess = Sq. ft.

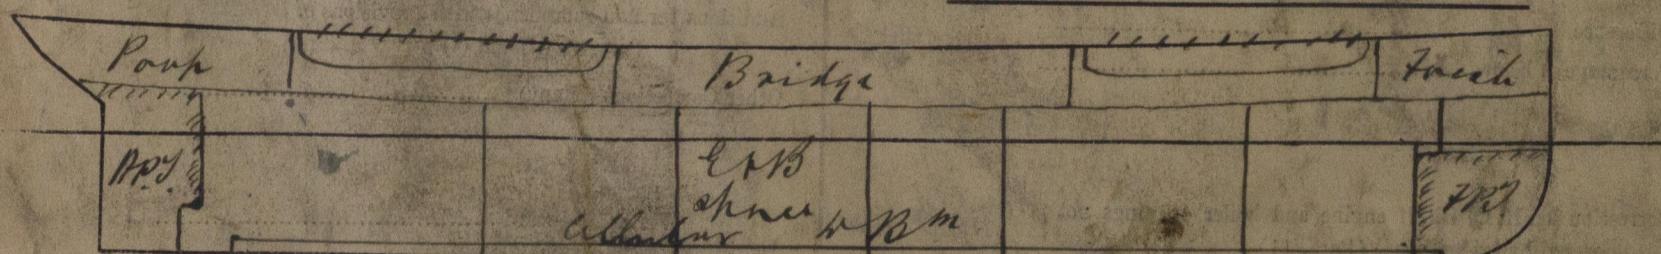

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel. Hull screw rudder, cellular double bottom  
bulk and frames with round frames. Standard "A" vessel.

Owners Builders: - Messrs Richardson & Son Ltd  
Address Stockton-on-Tees.

Fee £ : 7 : 0 Received by me 27.3.20 R.W.N.

